IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

TAND TRADEMARK OFFICE

Patent Application Transmittal

Stant Commissioner for Patents X PATENT APPLICATION
Stington, D.C. 20231

Sir:

IBM DOCKET NO. AM9-99-0097

IBM Corporation Intellectual Property Law Dept. 650 Harry Road, C4TA/J2B San Jose, CA 95120-6099

Date: April 27, 2000



Transmitted herewith for filing is the **Patent application** of:

Inventor: Reiner Kraft et al.

For: TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND

Enclose	d are:						
×	4 sheets of drawings.						
×	An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.						
	A certified copy of a _				_ application.		
×	Declaration and Powe	r of Attorney.					
☐ The filir	Information Disclosure g fee has been calculat		•	cited reference	s.		
		(Col. 1)	(Col. 2	2)	Other Than	Small Entity	
For:		No. Filed	No. Ex	ktra	Rate	Fee	
Basic F	ee		120			\$ 690.00	
Total C	Claims	27- 20=	7		x \$18.00=	\$126.00	
Indepe	ndent Claims	6- 3=	3		x \$78.00=	\$ 234.00	
☐ Mu	Itiple Dependent Cla	im Presented			\$260.00	\$	
					TOTAL	\$1050.00	
X	Please charge Deposit	Account No. 09-	- 0441 i n th	ne amount of \$	1 <u>050.00</u> . A duplicate co	ppy of this sheet is enc	losed.
×					he following fees associate uplicate copy of this sheet		ation or
		ional filing fees r					
	Any pater	nt application pro	cessing fe	es under 37 C	FR §1.17.		
CERT	CERTIFICATE OF MAILING UNDER 37 CFR 1.10				Respectfully submitted,		
I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Assistant				FOR:	Reiner Kraft et al.		
Commissioner for Patents, Box Patent Application, Washington, D.C. 20231 as "Express Mail Post Office to Addressee".				BY:	Suiteyma)	
Mailing Label No. EL547719235US					Attorney: Shirley S. Ma		
Jon —	on April 27, 2000 Kara Laudano				Registration No.: 44,216 Tel.: 203-787-0595		
Name	Name of person mailing/paper Au Faudu 4/27/00				00feesheet		
Signatu		Date					

Inventor One Given Name:: Reiner

Family Name:: Kraft

Postal Address Line One:: 9406 Wetsand Court

City:: Gilroy

State or Province:: CA
Postal or Zip Code:: 95020
Citizenship Country:: Germany

Inventor Two Given Name:: Michael L

Family Name:: Emens

Postal Address Line One:: 6530 Korematsu Court

City:: San Jose

State or Province:: CA
Postal or Zip Code:: 95120
Citizenship Country:: USA

Inventor Three Given Name:: Gaurav

Family Name:: Tewari

Postal Address Line One:: 3 Ames Street #353

City:: Cambridge

State or Province:: MA
Postal or Zip Code:: 02142
Citizenship Country:: India

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 22891

Fax One:: 202-787-5818

Electronic Mail One:: delpet@delpet.com

APPLICATION INFORMATION

Title Line One:: TECHNIQUE AND METHOD WHICH DYNAMICALLY G Title Line Two:: ENERATES VARIOUS DEPTH LEVELS OF ABSTRAC Title Line Three:: TS FOR TEXT BASED DATA SOURCES ON DEMAND

Total Drawing Sheets:: 4
Formal Drawings?:: No
Application Type:: Utility
Docket Number:: AM9-99-0097

Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 22891

Source:: PrintEFS Version 1.0.1

APPLICATION

FOR

UNITED STATES LETTERS PATENT

APPLICANT NAME:

REINER KRAFT ET AL.

TITLE:

TECHNIQUE AND METHOD WHICH DYNAMICALLY

GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS

FOR TEXT BASED DATA SOURCES ON DEMAND

DOCKET NO .:

AM9-99-0097

INTERNATIONAL BUSINESS MACHINES CORPORATION

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C., 20251 as "Express Mail Post Office to Addressee"

Mailing Label No._

il 22 2000

Name of person mailing paper

Signature

4/27/00

ibma100002000

TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND

Background Of The Invention

1. Field of the Invention

- -

5

10

15

20

25

This invention is related to a technique and method for handling the amount of information retrieved from a search request sent to an Internet search engine, particularly wherein the user at the client computer side may dynamically change the depth of information from a search result abstract.

2. Description of Related Art

The advent of the Internet as an everyday useful tool in gathering information as gained considerable momentum in the past decade. People using the Internet today can be as diverse as an elementary school student searching an on-line encyclopedia to complete a homework assignment to a scientist looking for the latest articles in their field of research. There is so much information available on the Internet but there is still very little organization to the Internet that sometimes it may seem impossible to find the right information or documents that you want without having to wade through a seemingly endless list of search results.

One method of structuring information on the Internet is an index. Indexes allow the user to browse through information which has been organized according to categories such as sports, arts, business, etc., and their corresponding subcategories. One popular index on the Internet today is Yahoo!®. By selecting a category and/or a subcategory, the user finally gets to a list of documents and their uniform resource locators for further browsing.

1

10

15

20

Another popular way of finding information is to use search engines which are massive databases that cover huge portions of the Internet. Unlike an index, a search engine does not return the data in categories but as a list of hits which contain, in decreasing order, the user's key word match. Typically, an Internet search engine returns a result set for a search query consisting of a URL (uniform resource locator) and a text based abstract of the original resource. Oftentimes, the user is able to control the length of the abstract. For example, HotBot® search engine at URL http://www.hotbot.com provides the user with a choice of displaying the search results as a list of URLs, the URL with a brief abstract, or a comprehensive abstract.

However, since the abstract has been compiled at the server site, once the abstract has been retrieved, there is no way of changing the abstract detail level without issuing a new query specifying a different level of detail in the abstract. Moreover, today's search engines do not provide the capability which allows a user to "zoom" in or out of an abstract thereby allowing the user to review search results more quickly and efficiently.

Bearing in mind the problems and deficiencies of the prior art, it is therefore an object of the present invention to provide a method of reviewing search results more quickly and efficiently for the Internet user searching for information.

It is another object of the present invention to provide a method of dynamically controlling the level of information from a list of search result abstracts at the client computer.

A further object of the invention is to provide a method of "zooming" in and out of the abstract wherein the user controls the level of detail to be displayed in the search result abstract.

Still other objects and advantages of the invention will in part be obvious and will in part be apparent from the specification.

2

10

15

20

25

Summary of the Invention

The above and other objects and advantages, which will be apparent to one of skill in the art, are achieved in the present invention which is directed to, in a first aspect, a method of summarizing a search result abstract on a client computer comprising the steps of initializing search parameters including defining a zoom level to define a search window comprising one or more words within the search result abstract; searching a first word within the search window to determine whether it is an indexable word; and adjusting the search parameters to move the search window throughout the search result abstract until a last search window is searched for an indexable word. The method of the first aspect further includes the step of displaying all found indexable words of the search result abstract. Other initial search parameters which may be initialized include, but are not limited to, a zoom function, a base index value, an offset value; a maximum search window, and a skip value.

In a second aspect, the present invention is directed to a method of locating indexable words within a search result abstract retrieved from a search engine comprising the steps of assigning a sequential number to each word of the search result abstract; determining a zoom level; defining a maximum search window based on the zoom level; setting a base index at a first word of the search result abstract wherein the base index has an initial value of one, the base index being a focal point of the maximum search window; searching for an indexable word at the base index; searching for an indexable word within the search window when the first word at the base index is not an indexable word; setting the base index at other words within the search window to establish a subsequent search window and searching for indexable words within the subsequent search window; and displaying a condensed abstract comprising found indexable words in the search result abstract. The method may further include the step of determining whether to fix the base index at a found indexable word as a basis for the step of setting the base index at other words within a subsequent search window. Preferably, the step of searching for indexable words within the search

10

15

25

window comprises searching a number of words to the right and left of the base index within the maximum search window for an indexable word.

In a third aspect, the present invention is directed to a method of dynamically generating differing levels of detail in a search result abstract on a user computer comprising the steps of engaging a zoom function; determining a zoom level as set by a user of the user computer; determining whether a random window flag is set; assigning sequential numbers to each word of the search result abstract; initially setting a base index at a first word of the search result abstract; initially setting an offset value as a word at the base index; determining a maximum search window based on a value of the zoom level; determining a skip value based on the zoom level; determining whether a fix base index flag is set; searching a first maximum search window for an indexable word at the base index; searching subsequent maximum search windows for an indexable word at an index comprising the base index and the offset value; determining whether the offset value is greater than a value of the maximum search window wherein if the offset value is greater than the value of the maximum search window, then setting the index at a word corresponding to a value of the base index and the skip value; determining whether a word at the index is an indexable word wherein if the word at the index is not an indexable word, then adjusting the offset value such that another word is at the index; setting the base index to the indexable word at the index when the fix base index flag is set; and setting the index to the word corresponding to a value of the base index and the skip value when the fix base index flag has not been set.

Preferably, the step of adjusting the offset value comprises the steps of picking a random number within the maximum search window having a value greater than a negative value of the maximum search window and less than a value of the maximum search window when the random window flag has not been set; determining whether the offset value is equal to zero if the random window flag has not been set; obtaining another offset value by increasing the offset value by one if the offset value is determined to be equal to zero; determining whether the offset value is greater than

10

15

20

25

zero if the offset value is not equal to zero; obtaining another offset value by multiplying the offset value by negative one and adding one if the offset value is greater than zero; and obtaining another offset value by multiplying the offset value by negative one if the offset value is less than zero.

In a fourth aspect, the present invention is directed to an article of manufacture comprising a computer usable medium having computer readable program code means embodied therein for causing a computer to dynamically summarize a search result abstract, the computer readable program code means in the article of manufacture comprising computer readable program code means for causing a computer to initialize search parameters including defining a search window comprising one or more words within the search result abstract; computer readable program code means for causing the computer to search the words within the search window for an indexable word; and computer readable program code means for causing the computer to adjusting the search parameters to move the search window throughout the search result abstract until a last search window is searched for an indexable word.

In a fifth aspect, the present invention is directed to an article of manufacture comprising a computer usable medium having computer readable program code means embodied therein for causing a computer to locate indexable words within a search result abstract retrieved from a search engine, the computer readable program code means for causing a computer to assign a sequential number to each word of the search result abstract; computer readable program code means for causing the computer to determine a zoom level; computer readable program code means for causing the computer to define a maximum search window comprising one or more words based on the zoom level; computer readable program code means for causing the computer to set a base index at a first word of the search result abstract wherein the base index has an initial value of one, the base index being a focal point of the maximum search window;

10

15

20

25

indexable word at the base index; computer readable program code means for causing the computer to search for an indexable word within the search window when the first word at the base index is not an indexable word; computer readable program code means for causing the computer to set the base index at other words to establish a subsequent search window and searching for indexable words within the subsequent search window; and computer readable program code means for causing the computer to display indexable words in accordance with the zoom level.

In a sixth aspect, the present invention is directed to an article of manufacture comprising a computer usable medium having computer readable program code means embodied therein for causing a computer to dynamically generate differing levels of detain in a search result abstract, the computer readable program code means in the article of manufacture comprising: computer readable program code means for causing a computer to engage a zoom function; computer readable program code means for causing the computer to determine a zoom level; computer readable program code means for causing a computer to determine whether a random window flag is set; computer readable program code means for causing a computer to assign sequential numbers to each word of the search result abstract; computer readable program code means for causing a computer to initially set a base index at a first word of the search result abstract; computer readable program code means for causing a computer to initially set an offset value as a word at the base index; computer readable program code means for causing a computer to determine a maximum search window based on a value of the zoom level, the maximum search window; computer readable program code means for causing a computer to determine a skip value based on the zoom level, the skip value equal to one less than twice the value of the zoom level; computer readable program code means for causing a computer to determine whether a fix base index flag is set; computer readable program code means for causing a computer to search a first maximum search window for an indexable word at the base index; -computer readable program code means for causing a computer to search subsequent

10

15

20

maximum search windows for an indexable word at an index comprising the base index and the offset value; computer readable program code means for causing a computer to determine whether the offset value is greater than a value of the maximum search window wherein if the offset value is greater than the value of the maximum search window, then setting the index [or the base index] at a word corresponding to a value of the base index and the skip value; computer readable program code means for causing a computer to determine whether a word at the index is an indexable word wherein if the word at the index is not an indexable word, then to adjust the offset value such that the index is set to another word; computer readable program code means for causing a computer to set the base index to the indexable word at the index when the fix base index flag is set; and computer readable program code means for causing a computer to set the index to the word corresponding to a value of the base index and the skip value when the fix base index flag has not been set.

Brief Description of the Drawings

The features of the invention believed to be novel and the elements characteristic of the invention are set forth with particularity in the appended claims. The figures are for illustration purposes only and are not drawn to scale. The invention itself, however, both as to organization and method of operation, may best be understood by reference to the detailed description which follows taken in conjunction with the accompanying drawings in which:

Fig. 1 is a schematic representation of the program architecture of the present invention.

Fig. 2 is a flow diagram illustrating the overall method steps of the present invention.

Fig. 3 is a flow diagram illustrating the method of finding a next indexable word in a search window in accordance with the present invention.

10

15

20

25

Fig. 4 is a flow diagram illustrating the method of finding a next indexable word in a search window when a word is not an indexable word in accordance with the present invention.

Description of the Preferred Embodiment(s)

In describing the preferred embodiment of the present invention, reference will be made herein to Figs. 1-4 of the drawings in which like numerals refer to like features of the invention. Features of the invention are not necessarily shown to scale in the drawings.

Generally, the present invention provides the Internet user the ability to increase or decrease the abstract detail level for a text based resource retrieved from a list of search engine results at the user computer. Preferably, the present invention is embodied as a software program used in conjunction with a web browser incorporating known program source code or as a plug-in (a file containing data used to alter, enhance, or extend the operation of a parent application). Typical web browser programs including Netscape Navigator® available from Netscape Communications, Inc. or Internet Explorer® available from Microsoft, Inc. would support such a plug-in. The program source code embodying the present invention may be encoded in a tangible media which creates the means for causing the computer to perform the various steps of the present invention.

The software architecture of the present invention is illustrated in Fig. 1. A user sends out a search request via a web browser to a search engine. The search engine returns a list of search results containing a list of URLs and a very brief abstract. Once the user determines whether the search result is of interest, the user engages the present invention, preferably embodied as a software program, to "zoom out" of the abstract thereby retrieving greater details of the abstract to further determine whether the resource is useful or not. This process may be repeated as long as the

10

15

20

25

"zoom" level satisfies the user's needs. The user is also able to "zoom in" on the abstract to diminish the detail level. The present invention provides a "zoom" manager as a means for enabling the "zooming" function and determining the "zoom" level set by the user. In addition to the "zoom" manager, the present invention also provides for a query manager which interfaces with the "zoom" manager, the client computer, and the search engine. Advantageously, the process of the present invention is performed entirely on the user side without having to reset the abstract level at the server side with a new query. The present invention could also be useful as a filter for email applications to let users quickly identify the contents of an email message allowing junk email or spam to be easily detected.

Fig. 2 is a flow diagram illustrating the overall method steps of the present invention beginning at 200 wherein each word of the abstract is determined to be an indexable word or a noise word beginning with the first word of the abstract. An indexable word is generally a noun or verb or other key word which would be of interest to the user. A noise word is typically a non-key word, e.g., pronoun, "to", "the", and the like. A dictionary of indexable words and noise words may be incorporated as a searchable table into the present invention.

A series of zooming parameters must be initialized 210 prior to searching for indexable words in the abstract. Such parameters include, but are not limited to, a "zoom" level, a maximum search window, a random window flag, a base index, an offset value, a fix base index flag, and a skip value. The "zoom" level may have a value of zero or greater which determines the size of a maximum search window. The maximum search window has a value which is one less than the "zoom" level representing the maximum number of words within a search window which can be searched for an indexable word. When the present invention searches for an indexable word in the abstract, a windowing technique is utilized. For example, if the "zoom" level is 3, the maximum search window has a value of 2, thus, two words to the right and left of the index are searched for an indexable word. Since noise words are

9

AM9-99-0097

10

15

20

25

undesirable and will not provide much useful information to the user, another word will be searched for within the maximum window of words.

A random window flag may also be initialized at this juncture that if engaged a random windowing technique is used to locate another indexable word within the maximum search window when a found word is a noise word. A random number within the maximum search window size may be selected and the word located at the selected random number is determined to be an indexable word. Thus, the random number will have a value that is greater than a negative value of the maximum search window and less than the value of the maximum search window. A temporary storage table may be created to keep track of which words have already been searched within the maximum window to find indexable words so that a word previously searched will not be searched again.

The base index is initially set to a value of 1 relating to the first word of the abstract as a starting point from which the words in the abstract are searched to find indexable words which may be sought and displayed to the user when "zooming" has been engaged and a "zoom" level greater than 1 has been chosen. It will be shown that each word in the abstract will be sequentially numbered beginning with the base index. As each word of the abstract is searched to determine whether it is an indexable word, the base index is a constantly shifting focal point within the maximum search window until each search window of the abstract has been searched.

An offset value is the maximum number of words to the right and left of the base index within the maximum search window with the base index acting as a focal point within the maximum search window. It is initially set to zero representing a zero distance from the base index and can be increased so long as it does not extend outside the maximum search window value. The offset value is the number of words away from the base index word within the maximum search window determined to be either an-indexable word or a "noise" word. When the word at the base index is not an

AM9-99-0097

10

15

20

25

indexable word, the offset value can be adjusted so that an indexable word may be located within the particular search window.

The fix base index flag is used to indicate which indexable word, the absolute indexable word or the found indexable word, is used as the basis from which the next indexable word is found. If the fix base index flag has been set, the base index is set to the found indexable word as the basis upon which the next word is located. However, if the fix base index flag has not been set, the base index is moved forward by adding the skip value as a basis for locating the next indexable word.

The skip value is equal to one less than twice the value of the zoom level. It is used in determining a new base index when the fix base index flag has not been set and when the offset value is zero.

The "zooming" is engaged when selected by the user which in turn initializes the parameters discussed above. The present invention proceeds to search the first window for an indexable word 220. For example, if the zoom level has a value of 2, the maximum search window is therefore one word to the right and left of the base index. Subsequently, once the first window is searched, it is determined whether there are subsequent windows 230 which need to be searched until there are no additional windows and the process ends 240. This method of searching the maximum search window is illustrated in the flow diagram of Fig. 3 with the process of looking at the next search window beginning at 300.

At the beginning of the search abstract, the maximum search window has only the word at the base index and the words to the right of the base index within the maximum search window. There are no words to the left of the base index at the beginning of the abstract. In searching the first search window, an index is set 310 from the original base index having a value of 1, and adding the value for the offset value, initially set at zero, such that the index is located at the base index or the first word of the abstract. The offset value is compared 320 to the value of the maximum

10

15

20

25

search window to determine if the offset value is greater than the value of the maximum search window. If the offset value is not greater than the value of the maximum search window, and it will not be greater when searching within that first search window since the offset value has an initial value of zero, the word at the index is searched to see if it is an indexable word 330. If the word at the index is an indexable word, the fix base index flag is considered 340. When the fix base index flag has been engaged at the time the initial parameters were initialized, the base index is then set to the indexable word 360. The word at the index is now the basis for finding the next indexable word.

Referring back to step 320, if the offset value is greater than the value of the maximum search window as in the case of searching windows occurring later on as the abstract is searched, the base index is set from the current base index and moved in accordance with a skip value 350 which was previously initialized and the next window with the new base index is searched for an indexable word. Likewise, if the fix base index flag has not been engaged, the base index is set from the current base index moving in accordance with the skip value 350, and the next window is searched.

When the word at the index is not an indexable word, the offset value must be adjusted. Fig. 4 illustrates a flow diagram wherein the maximum window representing the maximum searchable range of words in the abstract must be adjusted in order to locate the next indexable word. The process begins at 400 where it is determined whether the random window flag has been set 410. As discussed above, if the random window flag has been engaged, a random number is selected 470 having a value between a negative value of the maximum window value and a positive value of the maximum window so long as the value has not been previously used as the base index. This random number becomes the index from which the next indexable word is located (see 310).

However, if the random window flag has not been engaged, the offset value is adjusted. First, it is determined whether the offset value has a value of zero 420. If the

10

15

20

offset value has a value of zero as it does when it is initially set, the offset value is increased by 1 so that one word to the right of the base index may be determined to be an indexable word 440 within the maximum search window. If the offset value does not have a value of zero, it is determined 430 whether it has a value greater than zero. The offset value which does not have a value greater than zero, a negative value, is multiplied by -1 and increased by 1 so that the word to the right of the base index may be determined to be an indexable word 450. The offset value which has a value greater than zero is multiplied by -1 to obtain a negative value so that the word to the left and before the base index may be determined to be an indexable word 460. Once the offset values have been adjusted, the window is again searched to determine whether the word at the new index is an indexable word.

Once the present invention has searched every maximum search window for indexable words, a display function will display all the indexable words selected from the zooming process. Each word that has been found to be an indexable word is marked for display. Noise words will not be displayed since they provide little to no information to the user. Only when the user disengages the "zoom" function to review the entire abstract will all words in the search result abstract be displayed.

Example #1

A search result initial abstract comprising "Yahoo! Address Book is a powerful online contact manager" is assigned sequential numbers as shown below wherein words 4 and 5 are non-indexable noise words:

	<u>No.</u>	Word
	1	Yahoo!
	-2-	Address
	3	Book
5	4	is
	5	a
	6	powerful
	7	online
	8	contact
10	9	manager

The method of the present invention analyses the abstract when the user engages the zoom function to initialize the zooming parameters:

	<u>Parameters</u>	Initial Value
	zoom level	2
15	max. search window	1
	random window flag	not set
	fix base index flag	set
	base index	1
	offset	0
20	-skip value	3

The index is set at the first word of the abstract, "Yahoo!", since the index has a value of 1 comprising a value of the base index (initially set at 1) and the offset value (initially set at 0, thus, not greater than 1). The first word of the abstract, "Yahoo!" is determined to be an indexable word. When the fix base index flag is set, the base index is set to the first word, "Yahoo!", found to be an indexable word. "Yahoo!" will then be tagged for display in the condensed abstract.

The base index then jumps to word 4. However, word 4, "is", is a non-indexable noise word, thus, another indexable word must be selected. The offset value

10

20

25

is adjusted by increasing it by 1 to determine whether word 5, "a", is an indexable word. Since word 5 is a non-indexable noise word, the offset value is again adjusted to -1 to determine whether word 3 is indexable. Word 3, "Book", is an indexable word and is tagged for display in the condensed abstract. Note that the maximum search window will encompass words 3, 4, and 5.

The base index, at word 3, is moved in accordance with the skip value to word 6, "powerful". Word 6 being an indexable word is tagged for display in the condensed abstract. The base index then jumps to word 9, "manager", and since it is also an indexable word is tagged for display in the condensed abstract. Since the last word of the abstract is word 9, the condensed abstract is displayed as follows:

	<u>No.</u>	Displayed Word
	1	Yahoo!
	2	Address
	3	Book
15	6	powerful
	7	online
	8	contact
	9	manager

The present invention achieves the objects recited above. The present method and technique allows users to "zoom" in and "zoom" out of a text based data source to generate a dynamical view of the data in a detail level controlled by the user. This allows a user to specify a convenient depth level in reviewing information particularly useful in Internet search results. The user can skim the search engine results more efficiently by changing the depth level of abstract information. The present invention makes information more manageable and provides functionality to users by identifying desired information more quickly given the overwhelming breadth of information available through the Internet.

While the present invention has been particularly described, in conjunction with a specific preferred embodiment, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. It is therefore contemplated that the appended claims will embrace any such alternatives, modifications and variations as falling within the true scope and spirit of the present invention.

Thus, having described the invention, what is claimed is:

Claims

A method of summarizing a search result abstract on a client computer comprising the steps of:

- initializing search parameters including defining a zoom level to define a search window comprising one or more words within the search result abstract;
- searching a first word within the search window to determine whether it is an indexable word; and
- adjusting the search parameters to move the search window throughout the search result abstract until a last search window is searched for an indexable word.
- 1 2. The method of claim 1 further includes the step of displaying all indexable words found in the search result abstract.
- 1 3. The method of claim 1 wherein the step of initializing search parameters further includes engaging a zoom function.
- 1 4. The method of claim 1 wherein the step of initializing search parameters further 2 includes setting a base index value.
- 5. The method of claim 4 wherein the step of initializing search parameters further includes setting the base index at an initial value of 1 such that a first word of the search result abstract within the search window is determined to be an indexable word.
- 1 6. The method of claim 1 wherein the step of initializing search parameters further includes the step of setting an offset value.
- 7. The method of claim 1 wherein the step of initializing search parameters further includes the step of determining a maximum search window

- 1 8. The method of claim 1 wherein the step of initializing search parameters further
- 2 includes the step of determining a skip value.
- 1 9. The method of claim 1 wherein the step of searching the words within the search
- window for an indexable word comprises searching a word at a base index within the
- search window to determine whether the word at the base index is an indexable word.
- 1 10. The method of claim 1 wherein the step of searching the word at the base index
- within the search window for an indexable word does not locate an indexable word, the
- 3 method further includes the steps of:
- 4 setting an index at a word within the search window to a value equal to the base
- 5 index and an offset value within a maximum search window;
- determining whether the word at the index is an indexable word; and
- determining whether to set the base index at the word to the index if the word at the
- 8 index is an indexable word.
- 1 11. The method of claim 10 wherein the step of determining whether a word at the
- 2 index is an indexable word does not locate an indexable word at the index, then the step
- 3 of determining whether a random number within the maximum search window may be
- 4 selected to obtain an another offset value occurs, the random number being greater than
- 5 a negative value of the maximum search window and less than a value of the maximum
- 6 search window.
- 1 12. The method of claim 11 wherein the step of determining whether a random
- 2 number within the maximum search window may be selected to obtain an another offset
- 3 value does not indicate that a random number may be selected, then the step of
- 4 adjusting the offset value until a new index is obtained occurs.

- 1 13. The method of claim 10 further including the step of searching within a 2 subsequent search window for an indexable word.
- 1 A method of locating indexable words within a search result abstract retrieved 2 from a search engine comprising the steps of:
- assigning a sequential number to each word of the search result abstract;
- 4 determining a zoom level;
- 5 defining a maximum search window based on the zoom level;
- setting a base index at a first word of the search result abstract wherein the base
- 7 index has an initial value of one, the base index being a focal point of the
- 8 maximum search window;
- 9 searching for an indexable word at the base index;
- searching for an indexable word within the search window when the first word at
- the base index is not an indexable word;
- setting the base index at other words within the search window to establish a
- subsequent search window and searching for indexable words within the
- subsequent search window; and
- displaying a condensed abstract comprising found indexable words in the search
- result abstract.
- 1 15. The method of claim 14 further including the step of determining whether to fix
- 2 the base index at a found indexable word as a basis for the step of setting the base index
- at other words within a subsequent search window.
- 1 16. The method of claim 14 wherein the step of searching for indexable words
- within the search window comprises searching a number of words right and left of the
- 3 base index within the maximum search window for an indexable word.

16

1

17.

The method of claim 14 wherein the step of setting the base index at other 2 words to establish a subsequent search window and searching for indexable words 3 within the subsequent window comprises adjusting the base index by a skip value to 4 obtain a new focal point for a subsequent search window. 1 18. The method of claim 14 wherein the step of setting the base index at other 2 words to establish a subsequent search window and searching for indexable words 3 within the subsequent window comprises adjusting the base index by an offset value to 4 obtain a new focal point for a subsequent search window when a word at the index is 5 not an indexable word. A method of dynamically generating differing levels of detail in a search result 1 2 abstract on a user computer comprising the steps of: 3 engaging a zoom function; 4 determining a zoom level as set by a user of the user computer; 5 determining whether a random window flag is set; 6 assigning sequential numbers to each word of the search result abstract; 7 initially setting a base index at a first word of the search result abstract; • 8 initially setting an offset value as a word at the base index; 9 determining a maximum search window based on a value of the zoom level; 10 determining a skip value based on the zoom level; determining whether a fix base index flag is set; 11 12 searching a first maximum search window for an indexable word at the base index; 13 searching subsequent maximum search windows for an indexable word at an index 14 comprising the base index and the offset value;

determining whether the offset value is greater than a value of the maximum search

window wherein if the offset value is greater than the value of the maximum

AM9-99-0097 20

17	search window, then setting the index at a word corresponding to a value of the
18	base index and the skip value;
19	determining whether a word at the index is an indexable word wherein if the word
20	at the index is not an indexable word, then adjusting the offset value such that
21	another word is at the index;
22	setting the base index to the indexable word at the index when the fix base index
23	flag is set; and
24	setting the index to the word corresponding to a value of the base index and the skip
25	value when the fix base index flag has not been set.
1	20. The method of claim 19 wherein the step of adjusting the offset value comprises
2	the steps of:
3	picking a random number within the maximum search window having a value
4	greater than a negative value of the maximum search window and less than a
5	value of the maximum search window when the random window flag has not
6	been set;
7	determining whether the offset value is equal to zero if the random window flag has
8	not been set;
9	obtaining another offset value by increasing the offset value by one if the offset
10	value is determined to be equal to zero;
11	determining whether the offset value is greater than zero if the offset value is not
12	equal to zero;
13	obtaining another offset value by multiplying the offset value by negative one and
14	adding one if the offset value is greater than zero; and
15	obtaining another offset value by multiplying the offset value by negative one if the
6	offset value is less than zero

AM9-99-0097

1	21. The method of claim 20 further including the step of continuing to search the				
2	subsequent maximum search windows.				
1	22. An article of manufacture comprising:				
2	a computer usable medium having computer readable program code means				
3	embodied therein for causing a computer to dynamically summarize a search				
4	result abstract, the computer readable program code means in the article of				
5	manufacture comprising:				
6	computer readable program code means for causing a computer to initialize search				
7	parameters including defining a search window comprising one or more words				
8	within the search result abstract;				
9	computer readable program code means for causing the computer to search the				
10	words within the search window for an indexable word; and				
11	computer readable program code means for causing the computer to adjusting the				
12	search parameters to move the search window throughout the search result				
13	abstract until a last search window is searched for an indexable word.				
1	23. The article of claim 22 wherein the computer readable program code means for				
2	causing the computer to search the words within the search window for an indexable				
3	word further comprises:				
4	computer readable program code means for causing a computer to set an index at a				
5	word within the search window to a value equal to a base index and an offset				
6	value when the computer readable program code means for causing the				
7	computer to search the words within the search window for an indexable word				
8	does not locate an indexable word;				
9	computer readable program code means for causing the computer to determine				
10	whether the offset value is greater than a maximum window value:				

11	computer readable program code means for causing the computer to set the base
12	index to a value equal to the base index and a skip value if the offset value is
13	greater than a maximum window value;
14	computer readable program code means for causing the computer to determine
15	whether a word at the index is an indexable word if the offset value is not
16	greater than a maximum window value; and
17	computer readable program code means for causing the computer to determine
18	whether to set the base index at the word at the index if the word at the index is
19	an indexable word.
1	24. The article of claim 23 wherein the computer readable program code means for
2	causing the computer to determine whether a word at the index is an indexable word
3	further comprises:
4	computer readable program code means for causing the computer to determine
5	whether a random number within the maximum search window may be selected
6	to obtain an another offset value occurs, the random number being greater than
7	a negative value of the maximum search window and less than a value of the
8	maximum search window.
	•
1	An article of manufacture comprising:
2	a computer usable medium having computer readable program code means
3	embodied therein for causing a computer to locate indexable words within a
4	search result abstract retrieved from a search engine, the computer readable
5	program code means in the article of manufacture comprising:
6	computer readable program code means for causing a computer to assign a
7	sequential number to each word of the search result abstract;
8	computer readable program code means for causing the computer to determine a

AM9-99-0097

zoom level;

10	computer readable program code means for causing the computer to define a
11	maximum search window comprising one or more words based on the zoon
12	level;
13	computer readable program code means for causing the computer to set a base index
14	at a first word of the search result abstract wherein the base index has an initia
15	value of one, the base index being a focal point of the maximum search window;
16	computer readable program code means for causing the computer to search for ar
17	indexable word at the base index;
18	computer readable program code means for causing the computer to search for an
19	indexable word within the search window when the first word at the base index
20	is not an indexable word;
21	computer readable program code means for causing the computer to set the base
22	index at other words to establish a subsequent search window and searching for
23	indexable words within the subsequent search window; and
24	computer readable program code means for causing the computer to display
25	indexable words in accordance with the zoom level.

An article of manufacture comprising:

- a computer usable medium having computer readable program code means embodied therein for causing a computer to dynamically generate differing levels of detain in a search result abstract, the computer readable program code means in the article of manufacture comprising:
- 6 computer readable program code means for causing a computer to engage a zoom
 7 function;
- 8 computer readable program code means for causing the computer to determine a 2 zoom level;
- computer readable program code means for causing a computer to determine

 whether a random window flag is set;

2

3

4

5

12	computer readable program code means for causing a computer to assign sequential
13	numbers to each word of the search result abstract;
14	computer readable program code means for causing a computer to initially set a
15	base index at a first word of the search result abstract;
16	computer readable program code means for causing a computer to initially set an
17	offset value as a word at the base index;
18	computer readable program code means for causing a computer to determine a
19	maximum search window based on a value of the zoom level, the maximum
20	search window;
21	computer readable program code means for causing a computer to determine a skip
22	value based on the zoom level, the skip value equal to one less than twice the
23	value of the zoom level;
24	computer readable program code means for causing a computer to determine
25	whether a fix base index flag is set;
26	computer readable program code means for causing a computer to search a first
27	maximum search window for an indexable word at the base index;
28	computer readable program code means for causing a computer to search
29	subsequent maximum search windows for an indexable word at an index
30	comprising the base index and the offset value;
31	computer readable program code means for causing a computer to determine
32	whether the offset value is greater than a value of the maximum search window
33	wherein if the offset value is greater than the value of the maximum search
34	window, then setting the index at a word corresponding to a value of the base
35	index and the skip value;
36	computer readable program code means for causing a computer to determine
37	whether a word at the index is an indexable word wherein if the word at the
38	index is not an indexable word, then to adjust the offset value such that the
39	index is set to another word;


40	computer readable program code means for causing a computer to set the base index
41	to the indexable word at the index when the fix base index flag is set; and
42	computer readable program code means for causing a computer to set the index to
43	the word corresponding to a value of the base index and the skip value when the
44	fix base index flag has not been set.
1	27. The article of claim 26 wherein the computer readable program code means for
2	causing a computer to adjust the offset value such that the index is set to another word
3	comprises:
4	computer readable program code means for causing the computer to pick a random
5	number within the maximum search window having a value greater than a
6	negative value of the maximum search window and less than a value of the
7	maximum search window when the random window flag has not been set;
8	computer readable program code means for causing the computer to determine
9	whether the offset value is equal to zero if the random window flag has not been
10	set;
11	computer readable program code means for causing the computer to obtain another
12	offset value by increasing the offset value by one if the offset value is
13	determined to be equal to zero;
14	computer readable program code means for causing the computer to determine
15	whether the offset value is greater than zero if the offset value is not equal to
16	zero;
17	computer readable program code means for causing the computer to obtain another
18	offset value by multiplying the offset value by negative one and adding one if
19	the offset value is greater than zero; and
20	computer readable program code means for causing the computer to obtain another
21	offset value by multiplying the offset value by negative one if the offset value is

less than zero.


TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND


ABSTRACT OF THE DISCLOSURE


The present invention discloses a method for dynamically generating an abstract from a search result abstract retrieved from a search engine. Preferably embodied as a software program, the present invention allows a user to "zoom" in and out of the abstract thereby retrieving greater or lesser details of the abstract to further determine whether the resource is useful or not. Groups of words within the search result abstract are searched for indexable words or key words useful to the user. The indexable words are then displayed to the user. Advantageously, the process of the present invention is performed entirely on the user side without having to reset the abstract level at the server side with a new query.

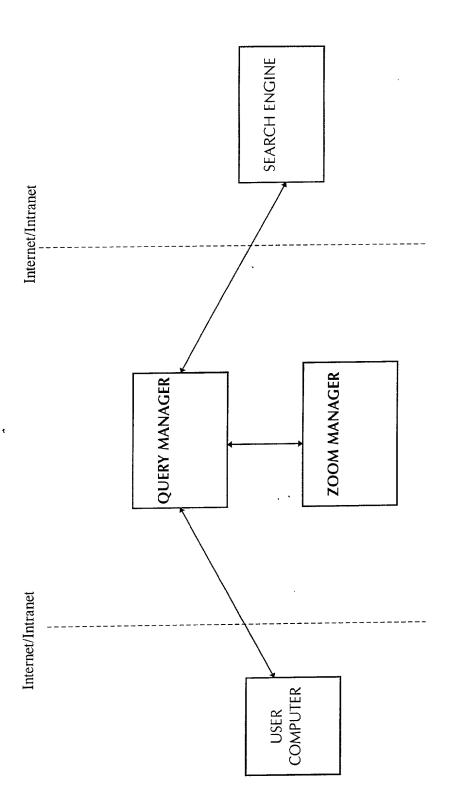

<u>ن</u>

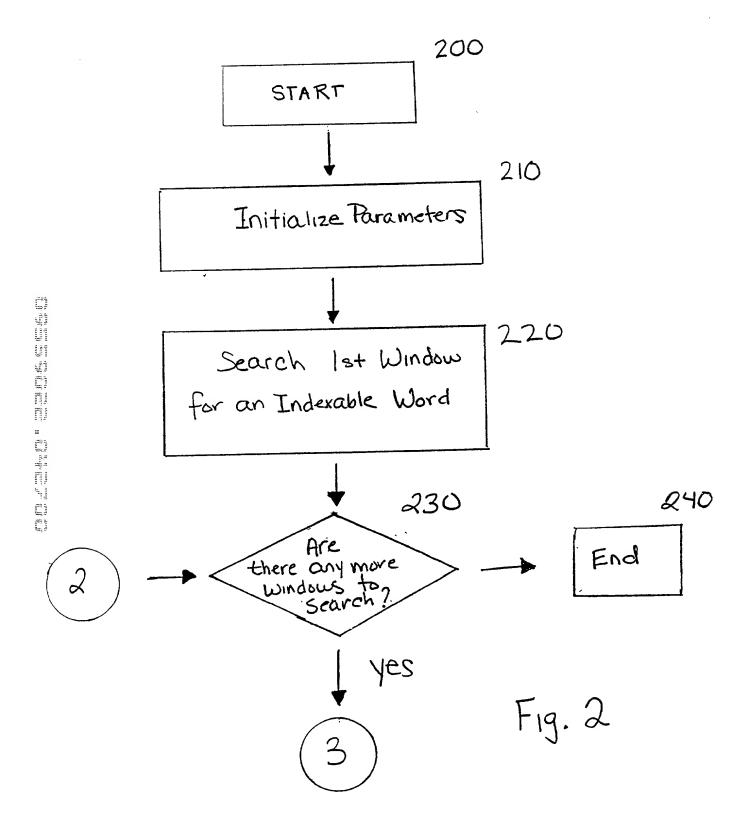

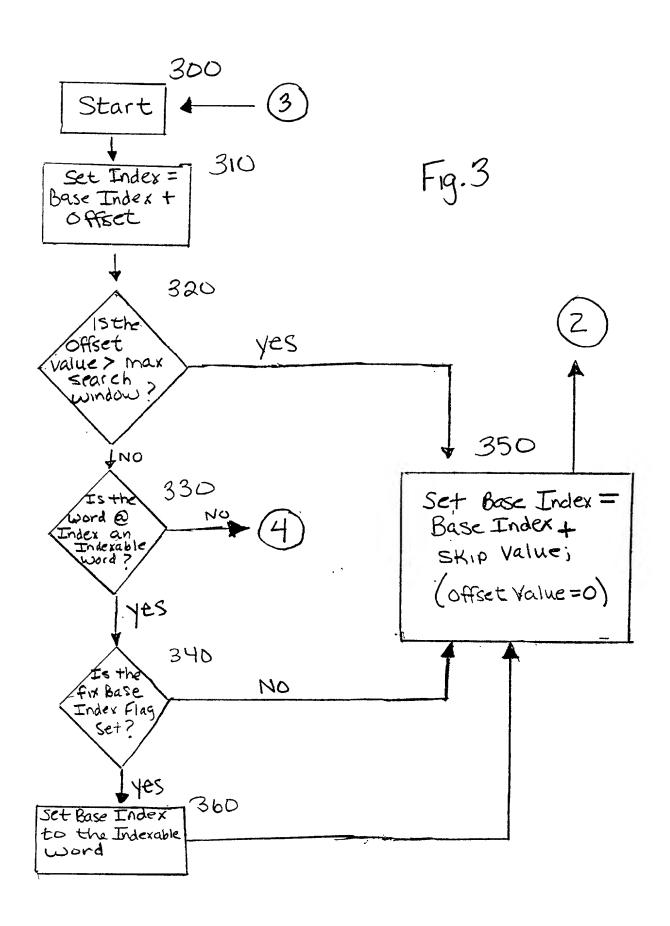

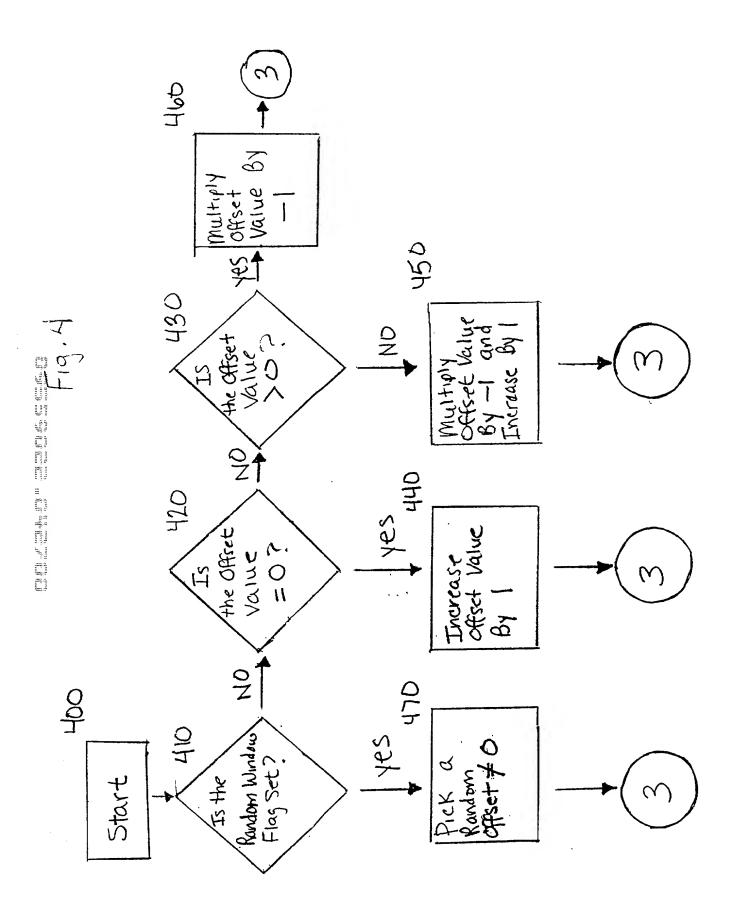

(MULTIPLE INVENTORS)

IBM Docket No: AM9-99-0097

Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND

was filed on _____as Application Serial No.____ and was amended on

I hereby state that I have reviewed and understand the contents of the above-identified

the specification of which (check one)

is attached hereto.

×

I hereby claim application(s) lis		USC §119(e) of any Filing Date	United States provisional				
Prior Foreign Number	Application(s): Country	Day/Month/Year	Priority Claimed				
I hereby claim foreign priority benefits under 35 USC §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:							
acknowledge the duty to disclose information which is material to the patentability as defined in 37 CFR §1.56.							
Lacknowledge t	specification, including the claims, as amended by any amendment referred to above.						

I hereby claim the benefit under 35 USC §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.

Filing Date

Status (patented, pending, abandoned)

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Anthony P. DeLio (Reg. No. 18,729); Peter W. Peterson (Reg. No. 31,867); John J. Tomaszewski (Reg. No. 26,241); Shirley S. Ma (Reg. No. 44,216); Robert Curcio (Reg. No. 44,638); Thomas R. Berthold (Reg. No. 28,689); Richard M. Ludwin (Reg. No. 33,010); Marc D. McSwain (Reg. No. 44,929); Alison D. Mortinger (Reg. No. 39,306); Khanh Q. Tran (Reg. No. 41,352).

Address all telephone calls to: Shirley S. Ma of DeLIO & PETERSON, LLC at (203) 787-0595.

Address all correspondence to: DeLIO & PETERSON, LLC

121 Whitney Avenue New Haven, CT 06510

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Inventor:

Reiner Kraft

Signature:

Date

Residence:

9406 Wetsand Court, Gilroy, CA 95020

Citizenship:

Germany

Post Office

Address:

SAME AS RESIDENCE

IBM100002000DEC

(2)	Inventor:	Michael L. Emens		
	Signature:		Date	
	Residence:	6530 Korematsu Court, San Jose, CA 95120		
	Citizenship:	USA		
	Post Office Address:	SAME AS RESIDENCE		
(3)	Inventor:	Gaurav Tewari		
	Signature:		Date	
	Residence:	3 Ames Street #353, Cambridge, MA 02142		
	Citizenship:	India		
	Post Office Address:	SAME AS RESIDENCE		

Page 3

(MULTIPLE INVENTORS)

IBM Docket No: AM9-99-0097

Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND

the specification of which (check one)

was filed on

is attached hereto.

X

Ĺ	ע ע	as filed on	as Appl	ication Serial No	·	and was amende	ed on
	_						
•				understand the			
	_	the duty to d FR §1.56.	lisclose infor	mation which	is mate	erial to the p	atentability as
applicat applicat below a patent o	ion(s) for ion wh and have r invent	or patent or ich designated e	inventor's of d at least of ied below, be, or PCT Int	der 35 USC § rertificate, or ne country ot by checking the rernational appropriational appropr	§365(a) ther than ne box,	of any PCT the United any foreign a	International States, listed application for
Prior	Foreign	Application((s):				
Number		Country		Day/Month/\	rear .	Priority Cla	aimed
•		the benefit	under 35 !	USC §119(e)	of any	United State	es provisional
•		Application N	lumber	Filing Date			

I hereby claim the benefit under 35 USC §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.

Filing Date

Status (patented, pending, abandoned)

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Anthony P. DeLio (Reg. No. 18,729); Peter W. Peterson (Reg. No. 31,867); John J. Tomaszewski (Reg. No. 26,241); Shirley S. Ma (Reg. No. 44,216); Robert Curcio (Reg. No. 44,638); Thomas R. Berthold (Reg. No. 28,689); Richard M. Ludwin (Reg. No. 33,010); Marc D. McSwain (Reg. No. 44,929); Alison D. Mortinger (Reg. No. 39,306); Khanh Q. Tran (Reg. No. 41,352).

Address all telephone calls to: Shirley S. Ma of DeLIO & PETERSON, LLC at (203) 787-0595.

Address all correspondence to:

DeLIO & PETERSON, LLC

121 Whitney Avenue New Haven, CT 06510

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1)	Inventor:	Reiner Kraft		
	Signature:		Date	
	Residence:	9406 Wetsand Court, Gilroy, CA 95020		
	Citizenship:	Germany		
	Post Office Address:	SAME AS RESIDENCE		

(2) Inventor:

Michael L. Emens

Signature:

4-5-2000

Date

Residence:

6530 Korematsu Court, San Jose, CA 95120

Citizenship:

USA

Post Office

Address:

SAME AS RESIDENCE

(3) Inventor:

Gaurav Tewari

Signature:

Date

Residence:

3 Ames Street #353, Cambridge, MA 02142

Citizenship:

India

Post Office

Address:

SAME AS RESIDENCE

IBM100002000DEC

(MULTIPLE INVENTORS)

IBM Docket No: AM9-99-0097

Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TECHNIQUE AND METHOD WHICH DYNAMICALLY GENERATES VARIOUS DEPTH LEVELS OF ABSTRACTS FOR TEXT BASED DATA SOURCES ON DEMAND

was filed on _____as Application Serial No.____ and was amended on

the specification of which (check one)

is attached hereto.

X

hereby state that I have reviewed and understand the contents of the above-identified pecification, including the claims, as amended by any amendment referred to above. acknowledge the duty to disclose information which is material to the patentability as					
defined in 37 CFI	defined in 37 CFR §1.56.				
I hereby claim foreign priority benefits under 35 USC §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:					
Prior Foreign	Application(s):				
Number	Country	Day/Month/Year	Priority Claimed		
I hereby claim application(s) list		5 USC §119(e) of any	United States provisional		

I hereby claim the benefit under 35 USC §120 of any United States application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.

Filing Date

Status (patented, pending, abandoned)

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Anthony P. DeLio (Reg. No. 18,729); Peter W. Peterson (Reg. No. 31,867); John J. Tomaszewski (Reg. No. 26,241); Shirley S. Ma (Reg. No. 44,216); Robert Curcio (Reg. No. 44,638); Thomas R. Berthold (Reg. No. 28,689); Richard M. Ludwin (Reg. No. 33,010); Marc D. McSwain (Reg. No. 44,929); Alison D. Mortinger (Reg. No. 39,306); Khanh Q. Tran (Reg. No. 41,352).

Address all telephone calls to: Shirley S. Ma of DeLIO & PETERSON, LLC at (203) 787-0595.

Address all correspondence to: DeLIO & PETERSON, LLC

121 Whitney Avenue New Haven, CT 06510

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1)	Inventor:	Reiner Kraft		
	Signature:		Date	_
	Residence:	9406 Wetsand Court, Gilroy, CA 95020		
	Citizenship:	Germany		
	Post Office Address:	SAME AS RESIDENCE		

IBM100002000DEC

(2)	Inventor:	Michael L. Emens	
	Signature:		Date
	Residence:	6530 Korematsu Court, San Jose, CA 95120	
	Citizenship:	USA	
	Post Office Address:	SAME AS RESIDENCE	
(3)	Inventor:	Gaurav Tewari	
	Signature:	<u>Caurar levan</u>	APRIL 4, 2000 Date
	Residence:	3 Ames Street #353, Cambridge, MA 02142	
	Citizenship:	India	
	Post Office Address:	SAME AS RESIDENCE	